

VERSALIFT

VTL-130-FZ

Pick-up mounted
telescopic platform



Available for class B
driving licence



LMC controls with
variable outreach



Emergency lowering
controls at the pedestal



Compact total
installation length



1 kV certified low
voltage insulation



VERSALIFT

A **TIME** MANUFACTURING COMPANY

VTL-130-FZ - Ford Ranger




Emergency operation from ground
(valve-bank mounted on pedestal)

Better performance (additional working
height and outreach)

■ Length: 6610 mm ■ Height: 2650 mm ■ Wheelbase: 3270 mm



Diagramme(s)

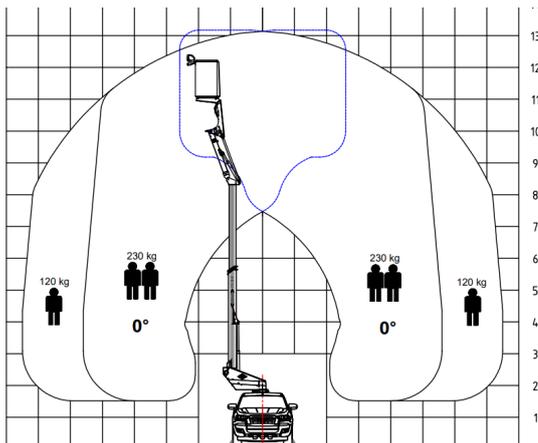

Options

- Outrigger pads with holders
- Flashinglights on the roof
- Aluminium cabinets for the chassis
- Safety stripes (red/white)
- Tilt sensor
- Inverter
- Home function & limited working area without outriggers



The shaped profile ultra high strength steel booms provide improved rigidity, stiffness and performance



Aluminium cabinets for the chassis



Ground level emergency lowering from the chassis (pedestal mounted valve bank)



LMC (Load Moment Control)
Variable outreach and up to 2 actions at a time (1 per joystick)

Notes

Technical information is subject to change without prior notice. Images may show optional equipment. Installations and/or options may not be available in your specific region.

* Depending on the vehicle.

** Max payload with a driver, a passenger and a full tank of fuel (220 kg added to the installation weight).

Distributor

Versalift International
Soendervang 3, 9640 Farsøe
Denmark

+45 9863 2433
sales@versalift.dk
versaliftinternational.com